




TOP HI-TECH CO., LTD.



Over 1000 hours  
of operation at  
100 °C ambient  
temperature

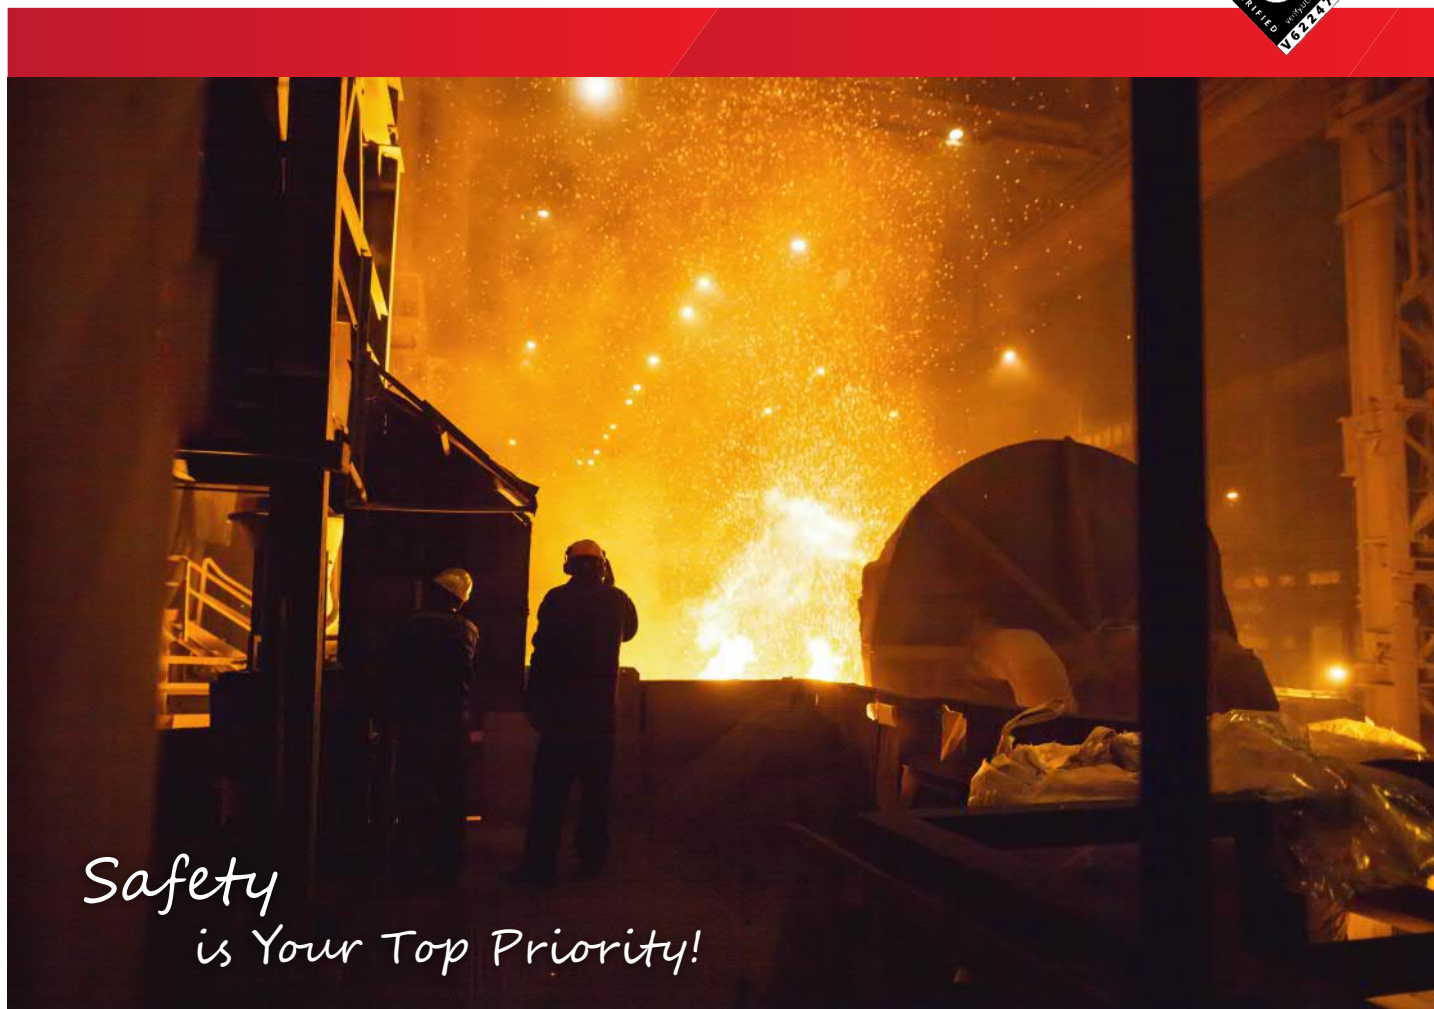

*Safety  
is Your Top Priority!*

# 85°C to 120°C Heat Resistant LED Light

THT's Solution for High-Temperature Application




# Common Issue for LED Lights in High Temperature Environment

Driver failure is quite common in high temperature (high-temp.) environment due to the limitation of the driver. The highest operating temperature for the LED driver is usually 85°C/185°F, but with the heat that are contributed from the high-temp. ambient and from the LED chips, driver failure process will be accelerated and create a shorter maintenance cycle for the LED lights.

Industries like pulp & paper, metal/forged, fire power plant, recycling plant, where has equipment for drying or heating in the plants, the ambient temperature will be high during operation and thus will have LED driver failure issue.

## THT's Solution for High-Temperature Application

- Eliminate Driver Components That Fail in High-Temperature
- Utilize THT's Unique and Efficient Heat Dissipation System for High Ambient Environment
- Construct Light Fixtures with Industrial Grade Heat Resistance Parts

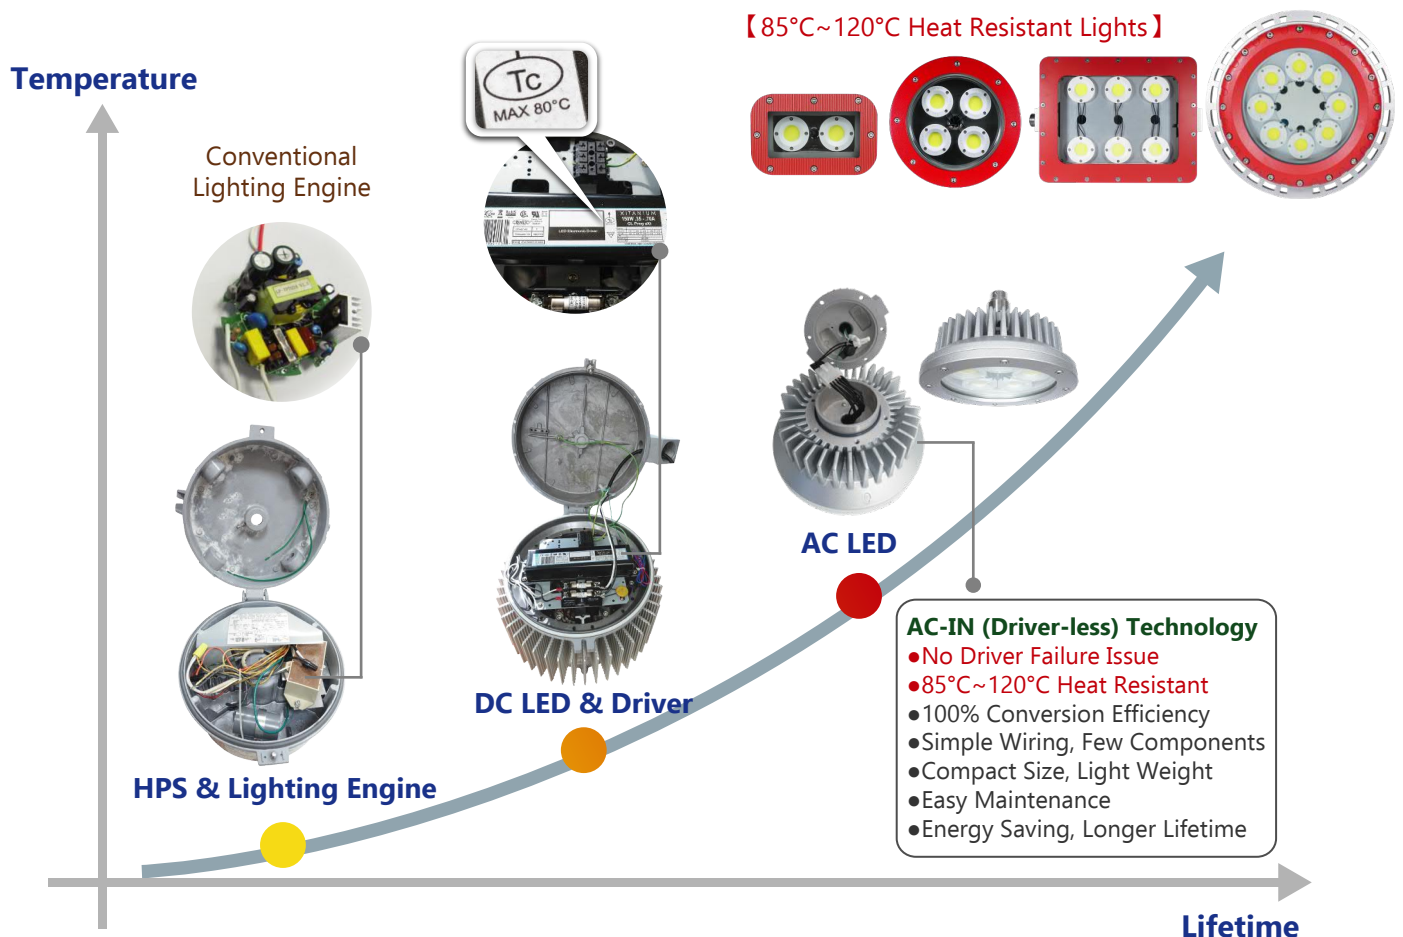

# Benefits of THT's Driverless Lights in High Temperature Environment

---


- ✓ Longer Lifespan than the LED Lights with Driver
- ✓ Reduce the Maintenance Cycles for LED Lights
- ✓ No Need to Shut Down the Factory Production Lines for Lighting Maintenance
- ✓ Save Time and Cost for Lighting Maintenance (Manpower, Manlift, Parts, etc.)
- ✓ Increase Safety for Working Environment (No Light Outages for Production Lines as well as Reduce the Possibility of Work Injury for Lighting Maintenance)

## Applicable Area High Ambient Environment

---



- Pulp & Paper (Cooking and Drying Area)
- Glass Factory (Processing Area)
- Metal Forging or Metal Recycling Plant (Heating or Forging Area)
- Oil & Gas (Furnace Towers or Compressor Rooms)
- Garbage Processing Plant (Burning Area)
- Coal Power Plant (Burning Area)
- Gas Turbine Power Plant (Gas Turbine Area)
- Painting Factory (Drying Area)
- Winery (Distillation Chamber)
- Textile (Dyeing and Finishing Area)
- Food Process (Heating, Cooking or Baking Area)

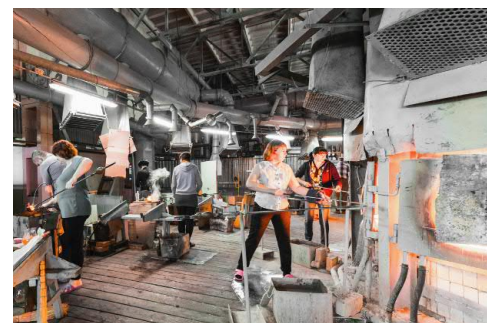





# UL High-Temp. Reliability Testing

Fixtures were tested at 100°C/212°F for 1000 hrs, and still maintain excellent lumen output. (100°C/212°F Testing reports are available upon request)

Over 1000 hours of operation at 100 °C ambient temperature



## 2023 Test Result

	Model	LED	Watt.	Volt.	C.C.T.
	L1319C 2ft	COB	40W	120V	5000K
	L1319C 2ft	COB	60W	120V	5000K
	L1319C 4ft	COB	80W	120V	5000K
	L1319C 4ft	COB	120W	120V	5000K

Watt. & Volt. lower than the test values are available upon request.

THT-EX

Pulp & Paper  
Glass Factory  
Steel Mill  
Power Plant  
Recycling Plant

## THT-EX



or even recycling plants, where furnaces, dryers and heaters operate at ambient temperature that is over 70° C (159°F),

## LED Lighting Solutions for High Temperature Areas





# UL High-Temp. Reliability Testing

Fixtures were tested at 100°C/212°F for 1000 hrs, and still maintain excellent lumen output. (100°C/212°F Testing reports are available upon request)

Over 1000 hours of operation at 100 °C ambient temperature



## 2023 Test Result

	Model	LED	Watt.	Volt.	C.C.T.
	L1102D	COB	60W	220V	5000K
	L2302	SMD	120W	220V	5000K
	L1733N	COB	120W	220V	5000K
	L1512D	COB	140W	277V	5000K
	L1733NS	SMD	150W	277V	5000K

Watt. & Volt. lower than the test values are available upon request.




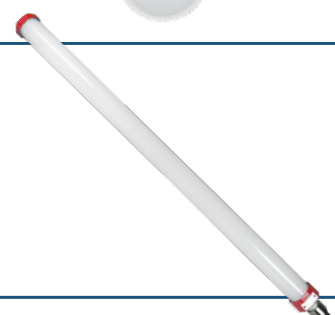






# UL High-Temp. Reliability Testing

Fixtures were tested at 85°C/185°F for 1000 hrs,  
and still maintain excellent lumen output.  
(85°C/185°F Testing reports are available upon request)



## 2023 Test Result

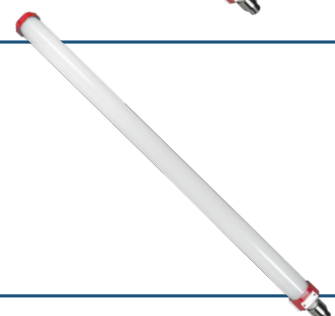	Model	LED	Watt.	Volt.	C.C.T.
	L1905	COB	20W	277V	5000K
	L1908 4ft	SMD	40W	220V	5000K
	L1102D	COB	80W	220V	5000K
	L2004 2ft	SMD	20W	220V	5000K
	L2004 4ft	SMD	40W	220V	5000K
	L2302	SMD	150W	220V	5000K

Watt. & Volt. lower than the test values are available upon request.



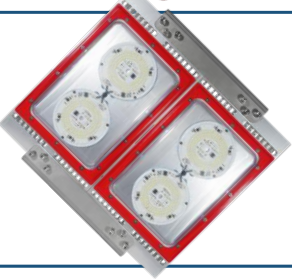





# UL High-Temp. Reliability Testing

Fixtures were tested at 85°C/185°F for 1000 hrs,  
and still maintain excellent lumen output.  
(85°C/185°F Testing reports are available upon request)



## 2023 Test Result

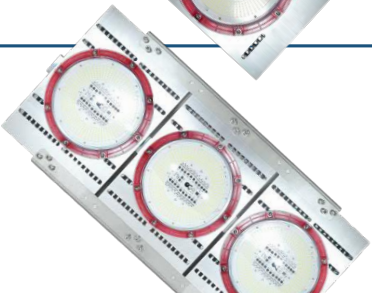	Model	LED	Watt.	Volt.	C.C.T.
	L1512D	COB	160W	220V	5000K
	L1733NS	SMD	170W	220V	5000K
	L1403L	SMD	200W	220V	5000K
	L1512D	SMD	250W	220V	5000K
	L1803A	SMD	500W	220V	5000K
	L1915	SMD	600W	220V	5000K

Watt. & Volt. lower than the test values are available upon request.



# UL High-Temp. Reliability Testing

Fixtures were tested at 85°C/185°F for 1000 hrs, and still maintain excellent lumen output. (85°C/185°F Testing reports are available upon request)



## 2019 Test Result

	Model	LED	Watt.	Volt.	C.C.T.
	L1203	COB	20W	277V	5000K
	L1705C	COB	50W	277V	5000K
	L1219C	COB	70W	220V	5000K
	L1511	SMD	75W	277V	5000K

Watt. & Volt. lower than the test values are available upon request.



100°C Heat Resistant Test  
AC-IN LED vs. DC-IN LED







# UL High-Temp. Reliability Testing

Fixtures were tested at 100°C/212°F for 720 hrs, and still maintain excellent lumen output. (100°C/212°F Testing reports are available upon request)



## 2018 Test Result

	Model	LED	Watt.	Volt.	C.C.T.
	L1319	SMD	40W	277V	5000K
	L1102	COB	60W	277V	5000K
	L1102	SMD	65W	277V	5000K
	L1217E	SMD	120W	277V	3000K
	L1217	COB	120W	277V	5000K

Watt. & Volt. lower than the test values are available upon request.



# UL High-Temp. Reliability Testing

Fixtures were tested at 85°C/185°F for 720 hrs, and still maintain excellent lumen output. (85°C/185°F Testing reports are available upon request)



## 2018 Test Result

	Model	LED	Watt.	Volt.	C.C.T.
	L1319	SMD	40W	277V	5000K
	P1202	COB	40W	277V	5000K
	L1102	COB	100W	277V	5000K
	L1217	COB	140W	277V	5000K
	L1217E	SMD	150W	277V	3000K

Watt. & Volt. lower than the test values are available upon request.





# THT High-Temp. Reliability Testing

Fixtures were tested at 120°C/248°F for 720 hrs, and still maintain excellent lumen output.  
(120°C/248°F Testing reports are available upon request)



## 2023 Test Result

	Model	LED	Watt.	Volt.	C.C.T.
	L1512D (10W*8)	COB	80W	220V	5000K
	L1512D (20W*4)	COB	80W	277V	5000K

Watt. & Volt. lower than the test values are available upon request.

## 【A Quick & Cost-Saving Lighting Solution - Retrofit Kits】



Upgrading Your Lighting  
from HID to LED Easily!

Video



The retrofit kits can be specified  
on many other product series.

THT-EX proposes the Retrofit Kits that doesn't require a lot of money to upgrade your old lighting fixtures. With retrofit kits (A/C/H/K Pan), you can quickly replace existing lighting fixtures and have a better, brighter, safer working environment!




# UL High-Temp. Reliability Testing

Fixtures were tested at 100°C/212°F for 1000 hrs, and still maintain excellent lumen output. (100°C/212°F Testing reports are available upon request)



## 2018 Test Result

	Model	LED	Watt.	Volt.	C.C.T.
	L1705A	COB	20W	277V	5000K

Watt. & Volt. lower than the test values are available upon request.




# UL High-Temp. Reliability Testing

Fixtures were tested at 85°C/185°F for 720 hrs, and still maintain excellent lumen output. (85°C/185°F Testing reports are available upon request)



## 2021 Test Result

	Model	LED	Watt.	Volt.	C.C.T.
	L1319C 2ft	SMD	40W	220V	5000K

Watt. & Volt. lower than the test values are available upon request.







**High Humidity (Waterproof IP67) & Heat Resistant LED Lighting**

- AC LED Driver-less Technology
- Intended for Use in High Ambient Temperature Environments

TOP HI-TECH CO., LTD.

**100°C Heat Resistant  
LED Lighting - All Tests**







THT-EX has an "in-house" high-temperature laboratory with multiple high-temperature baking machines.



**TOP HI-TECH CO, LTD.**



**Taiwan Headquarters**

9F., No.1, Zhongshan Rd., Tucheng Dist.,  
New Taipei City 23680, Taiwan  
Tel: +886-2-2267-1234  
Fax: +886-2-2269-1166  
E-mail: [sales@tht-ex.com](mailto:sales@tht-ex.com)  
Website: [www.tht-ex.com](http://www.tht-ex.com)



**Houston, U.S.A. Subsidiary**

933 East Airtex Drive, Houston, TX 77073  
Tel: +1-781-333-9313  
E-mail: [sales@tht-ex-usa.com](mailto:sales@tht-ex-usa.com)  
Website: [www.tht-ex-usa.com](http://www.tht-ex-usa.com)



**Japan Office**

4-9, Yaogi Kita, Yao Shi, Osaka Fu,  
581-0016, Japan  
Contact : Mr. Urahigashi Masao  
Tel: +81-72-924-7142  
E-mail: [urahigashi@tht-ex-japan.com](mailto:urahigashi@tht-ex-japan.com)  
Website: [www.tht-ex.jp](http://www.tht-ex.jp)