

L1905

20W



Clear PC Cover



Matte PC Cover

Net Weight: 4.3 kg (9.5 lb)



High Humidity & Heat Resistant LED Light

- ★ AC LED Driver-less Technology
- ★ Intended for Use in High Ambient Temperature Environments

High Ambient Temperature:

+65°C ~ +85°C (+149°F ~ +185°F)



Applications:

- Pulp & Paper (Cooking and Drying Area)
- Glass Factory (Processing Area)
- Metal Forging or Metal Recycling Plant (Heating or Forging Area)
- Oil & Gas (Furnace Towers or Compressor Rooms)
- Garbage Processing Plant (Burning Area)
- Coal Power Plant (Burning Area)
- Gas Turbine Power Plant (Gas Turbine Area)
- Painting Factory (Drying Area)
- Winery (Distillation Chamber)
- Textile (Dyeing and Finishing Area)
- Food Process (Heating, Cooking or Baking Area)

Standards:

UL 844
UL 1598
UL 8750
IEC 60079
EN 60079
CSA C22.2 No.250.0

Protection:

IP67

Electrical:

Rated Voltage (±10%)	120V / 220V / 277V AC	
Watts (±10%)	20W	
Amps	120V: 0.17A / 220V: 0.09A / 277V: 0.07A	Amp = Watt. / Volt.
Power Factor	$\cos \geq 0.9$	
Frequency	50 / 60 Hz	
LED Service Life	60,000 hrs*	*L70 at 55°C Ambient Temperature
Warranty	2 year warranty without warranting lumen depreciation.	

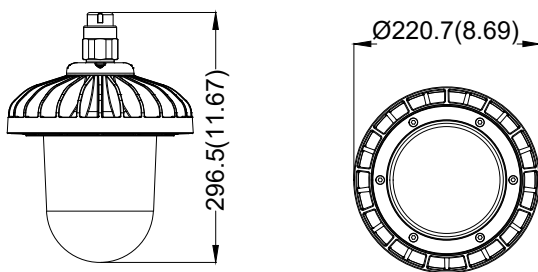
Mechanical:

Enclosure	Aluminum Alloy
Glass	Tempered Glass
Cable Gland	Stainless Steel

Optical:

Color of LED Light	5000K (Cool White)
CRI	≥ 70
Beam Angle	Clear PC Cover: X-127° / Y-127° ; Matte PC Cover: X-177° / Y-177°
Lm / W (±10%)	153 lm/w
Lumen (±10%)	3060 lm


Dimension: In mm (inches)




Optical Report:

COB test








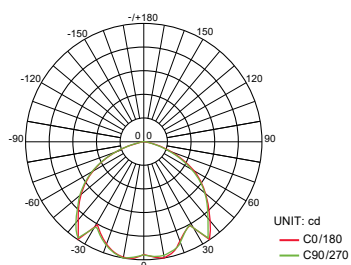
Polar Luminous
Intensity Distribution



Luminous
Intensity Distribution Diagram



Mounting Option & Dimension : In mm (inches)

Stanchion Mount 25° (S25)	Stanchion Mount 90° (S90)	Pendant Mount (P)	Ceiling Mount (C)
  5.3 kg (11.7 lb)	  5.4 kg (11.9 lb)	  4.6 kg (10.1 lb)	  6.2 kg (13.7 lb)